
accuc@ld

ARS8ML

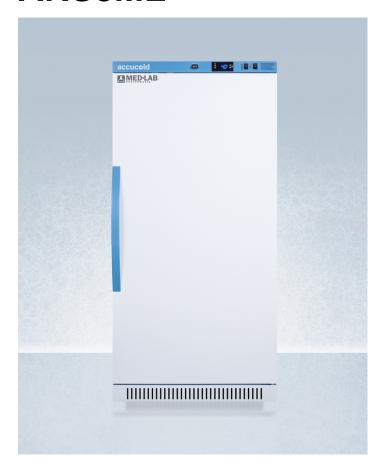

50" x 23.38" x 24.38" (H x W x D)

Performance series Med-Lab 8 cu.ft. upright all-refrigerator

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Additional sensor reads interior air temperature for superior temperature control

Product Features:

Purpose-built design	Designed and purpose-built to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications
+/-1°C Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +10°C
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup
Access port	Includes a pre-installed 3/8" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)
Audible power failure alarm	Battery-powered alarm sounds if the power connection is interrupted



accuc@ld

ARS8ML Specifications:

Compressor Step Depth

Overview	
Height of Cabinet	50.0" (127 cm)
Width	23.38" (59 cm)
Width with Door Open	23.88" (61 cm)
Depth	24.38" (62 cm)
Depth with Handle	26.13" (66 cm)
Depth with door at 90°	46.5" (118 cm)
Capacity	8.0 cu.ft. (227 L)
Defrost Type	Automatic
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	1.4
Voltage/Frequency	115 V AC/60 Hz
Weight	160.0 lbs. (73 kg)
Shipping Weight	170.0 lbs. (77 kg)
Estimated Time to Ship	1 to 2 days
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	
	Wire
Shelf Qty	Wire 7
Shelf Qty Adjustable Shelves	 -
	7
Adjustable Shelves	7 Yes
Adjustable Shelves Thermostat Type	7 Yes Digital
Adjustable Shelves Thermostat Type Fan Type	7 Yes Digital Interior
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type	7 Yes Digital Interior R600a
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount	7 Yes Digital Interior R600a 1.73oz.
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light	7 Yes Digital Interior R600a 1.73oz. Yes
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range	7 Yes Digital Interior R600a 1.73oz. Yes
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions	7 Yes Digital Interior R600a 1.73oz. Yes 2 to 10°C
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions Interior Height	7 Yes Digital Interior R600a 1.73oz. Yes 2 to 10°C
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount Interior Light Temperature Range Dimensions Interior Height Interior Width	7 Yes Digital Interior R600a 1.73oz. Yes 2 to 10°C 41.25" (105 cm) 20.0" (51 cm)

