accucold

ACR45LCAL



31.5" x 19.5" x 22.75" (H x W x D)

Pharmacy Series ADA compliant 20" wide built-in undercounter all-refrigerator for vaccine storage, frost-free with an internal fan, external digital controls and NIST calibrated thermometer, and lock

Highlights:

Less than 32" high to allow installation under lower ADA compliant counters

Specially designed to meet current CDC/VFC vaccine refrigeration guidelines for convenient storage in pharmacies and other healthcare facilities

High temperature alarm includes NIST calibrated external temperature readout (NIST certificate included)

Product Features:

Vaccine refrigerator	Purpose-built to meet the recommendations of the CDC and VFC for reliable vaccine storage
ADA compliant	Sized just under 32" high to allow installation under lower ADA compliant counters
Built-in capable	Front-breathing system allows the unit to be installed under cabinets with minimum clearance
Slim 20" width	Full 2.65 cu.ft. capacity inside conveniently slim footprint
Commercially listed	ETL-S listed to ANSI-NSF-7 commercial standards
High/low temperature alarm	Audible alarm sounds if the interior temperature rises or falls out of set range
NIST calibrated external temperature display	/ Alarm includes continuous NIST calibrated display of the current interior and high/low temperature, and can be switched from Celsius to Fahrenheit at the touch of a button
Certificate of calibration included	Calibrated to NIST standards in our ISO/IEC 17025:2017 certified laboratory, with a certificate included for your records
Digital thermostat	Digital microprocessor for easy and precise temperature management, with all controls externally located for added convenience

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

info@summitappliance.com

 \checkmark





accucold

ACR45LCAL Specifications:

Overview	
Height of Cabinet	31.5" (80 cm)
Width	19.5" (50 cm)
Depth	22.75" (58 cm)
Depth with Handle	23.63" (60 cm)
Depth with door at 90°	41.0" (104 cm)
Capacity	2.65 cu.ft. (75 L)
Defrost Type	Frost-Free
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Amps	1.0
Voltage/Frequency	115 V AC/60 Hz
Weight	79.0 lbs. (36 kg)
Shipping Weight	89.0 lbs. (40 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Wire
Shelf Qty	
ary	3
Adjustable Shelves	3 Yes
Adjustable Shelves	Yes
Adjustable Shelves Thermostat Type	Yes Digital Interior and
Adjustable Shelves Thermostat Type Fan Type	Yes Digital Interior and Exterior
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type	Yes Digital Interior and Exterior R600a
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount	Yes Digital Interior and Exterior R600a 0.99oz.
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI	Yes Digital Interior and Exterior R600a 0.99oz. 270.0
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI	Yes Digital Interior and Exterior R600a 0.99oz. 270.0 105.0
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty	Yes Digital Interior and Exterior R600a 0.99oz. 270.0 105.0 4
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light	Yes Digital Interior and Exterior R600a 0.99oz. 270.0 105.0 4 Yes
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light Temperature Range	Yes Digital Interior and Exterior R600a 0.99oz. 270.0 105.0 4 Yes
Adjustable Shelves Thermostat Type Fan Type Refrigerant Type Refrigerant Amount High Side PSI Low Side PSI Level Legs Qty Interior Light Temperature Range Dimensions	Yes Digital Interior and Exterior R600a 0.99oz. 270.0 105.0 4 Yes 2º to 8ºC

Compressor Step Height	3.5" (9 cm)
Compressor Step Width	19.5" (50 cm)
Compressor Step Depth	4.75" (12 cm)

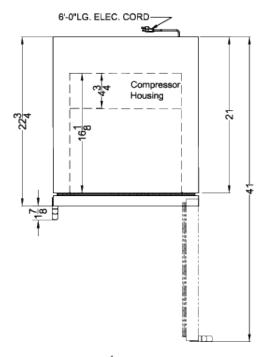



SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified 770 Garrison Avenue Bronx, NY 10474 USA TEL 718-893-3900 FAX 844-478-8799

