

Unwrapped FAST
273°F / 134°C


9 min

Wrapped Class B
273°F / 134°C

15 min


Wrapped Class B
250°F / 121°C

45 min

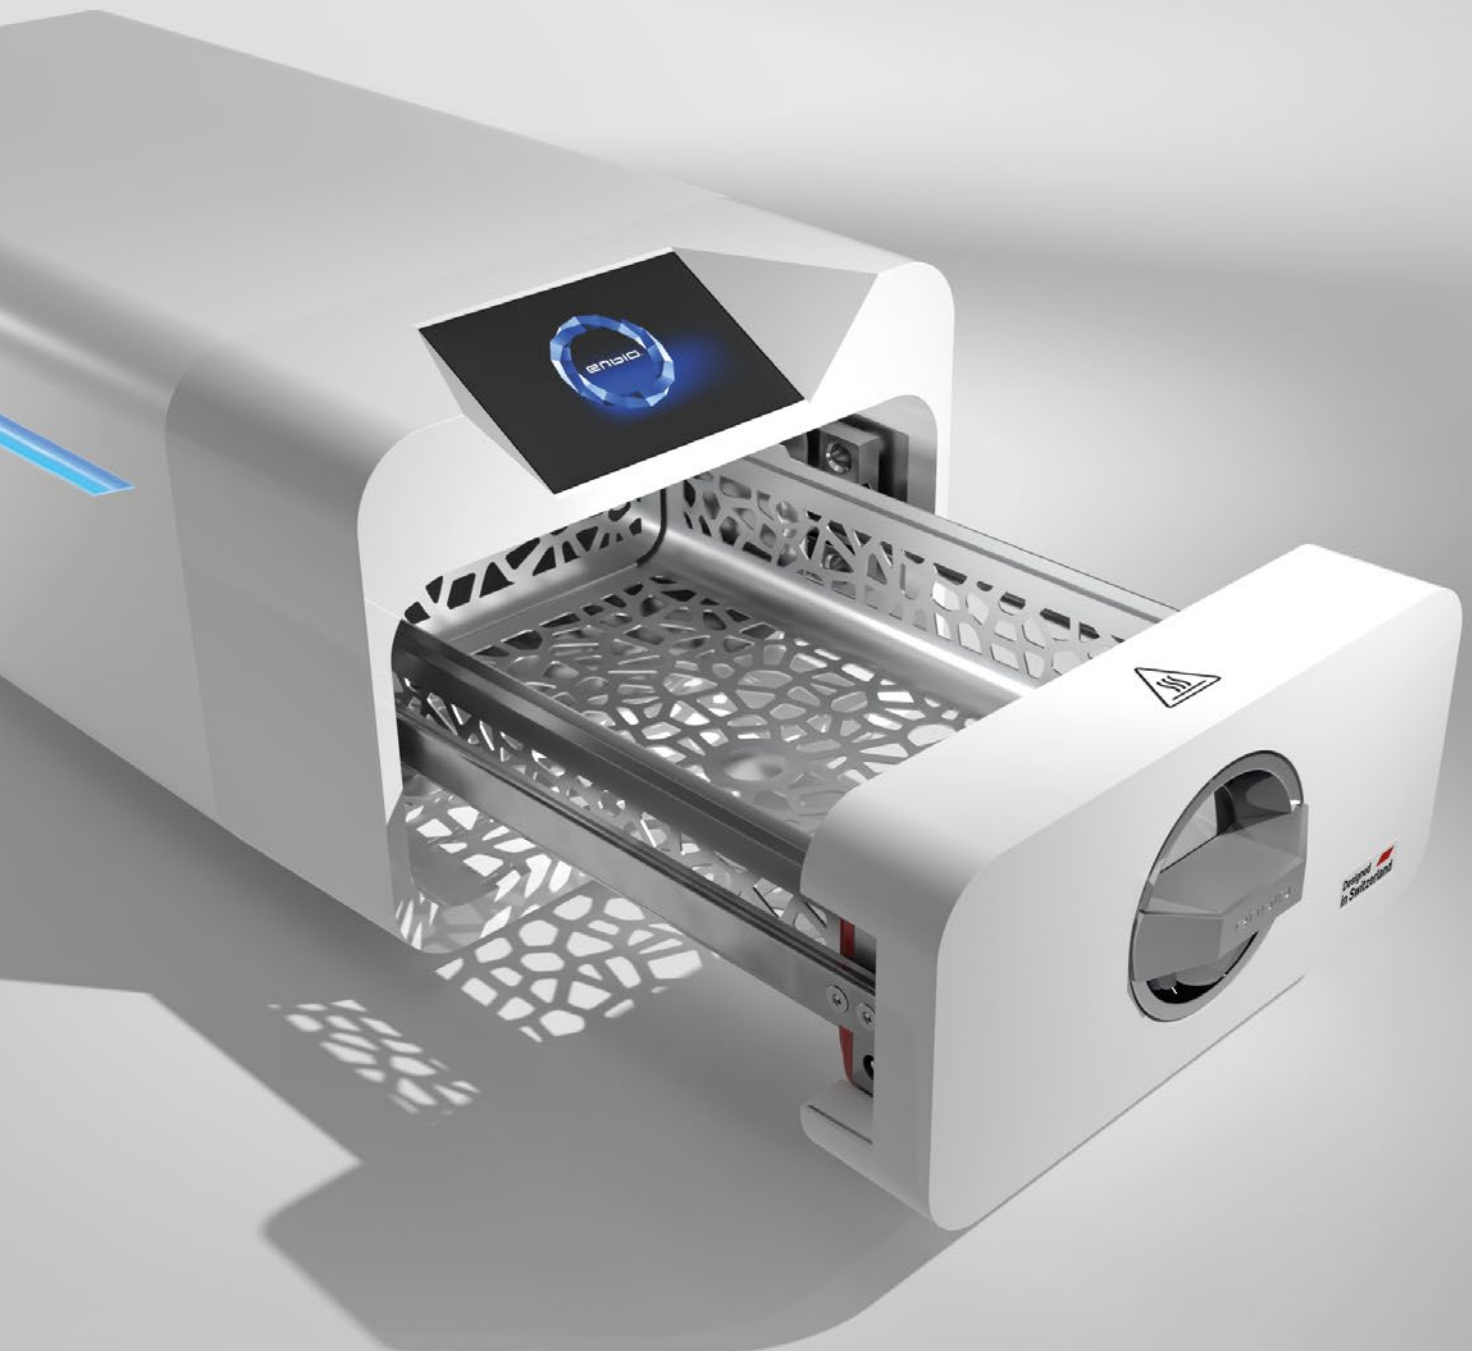


Enbio PRO Autoclave Technical Data

Capacity



x16

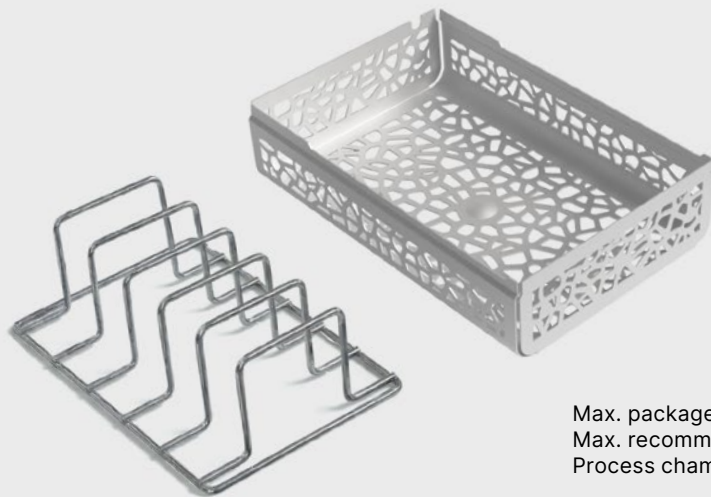

Load space
11.2×7.5×2.8 in
(28.5 cm x 18 cm x 7 cm)

Max. packages amount (circa)	16
Max. recommended batch weight	1.8 lb (0.8 kg)
Process chamber volume	5.3 l



Power supply

Enbio works with any typical electrical outlet.



Data archiving

All process data are automatically written to a USB disk.



Water supply

Enbio uses distilled water from external tank.



Process reports

Take full control of your sterilization process with **my.enbio app**.

Dimensions

22.6 in (57.5 cm)



10.6 in (27 cm)



7.9 in (20 cm)

Pressure & temperature

Working pressure	30.5 psi / 2.1 bar
Max. pressure	33.4 psi / 2.45 bar
Max. process temperature	278.6°F / 137°C

Electrical

Max. power supply	110-120V / 60Hz
Nominal power	3.25 kW
Max. power consumption	15 A

Misc.

Ingress protection	IP20
Data archiving	USB
Water conductivity*	< 15 µS/cm

* - demineralized water only

Enbio Group AG
Eichengasse 3, 4702 Oensingen
Switzerland

US Distribution Center: Enbio Corp.
1075 Highway 124, Building 300, Suite 300
Hoschton, GA 30548

enbio.com